www.ti.com

SCAS857A-MARCH 2008-REVISED OCTOBER 2008

# 28-BIT TO 56-BIT REGISTERED BUFFER WITH ADDRESS PARITY TEST ONE PAIR TO FOUR PAIR DIFFERENTIAL CLOCK PLL DRIVER

#### **FEATURES**

- JEDEC SSTE32882 Compliant
- 1-to-2 Register Outputs and 1-to-4 Clock Pair Outputs Support Stacked DDR3 DIMMs
- Chip Select Inputs Prevent Data Outputs from Changing State and Minimize System Power Consumption
- 1.5-V Phase Lock Loop Clock Driver Buffers One Differential Clock Pair (CK and CK) and Distributes to Four Differential Outputs
- 1.5-V CMOS Inputs
- Checks Parity on Command and Address (CS-gated) Data Inputs
- Supports LVCMOS Switching Levels on RESET Input
- RESET Input:
  - Disables Differential Input Receivers
  - Resets All Registers
  - Forces All Outputs into Pre-defined States
- Optimal Pinout for DDR3 DIMM PCB Layout
- Supports Four Chip Selects
- Single Register Backside Mount Support

### **APPLICATIONS**

- DDR3 Registered DIMMs up to DDR3-1333
- Single-, Dual- and Quad-Rank RDIMM

#### DESCRIPTION/ORDERING INFORMATION

This JEDEC SSTE32882-compliant, 28-bit 1:2 or 26-bit 1:2 and 4-bit 1:1 registering clock driver with parity is designed for operation on DDR3 Registered DIMMs up to DDR3-1333 with  $V_{\rm DD}$  of 1.5 V.

All inputs are 1.5-V, CMOS-compatible. All outputs are 1.5-V CMOS drivers optimized to drive DRAM signals on terminated traces in DDR3 RDIMM applications. Clock outputs Yn and Yn and control net outputs DxCKEn, DxCSn, and DxODTn can each be driven with a different strength and skew to optimize signal integrity, compensate for different loading, and balance signal travel speed.

The SN74SSQE32882 has two basic modes of operation associated with the Quad Chip Select Enable (QCSEN) input.

First, when the QCSEN input pin is open or pulled high, the component has two chip select inputs, DCS0 and DCS1, and two copies of each chip select output, QACS0, QACS1, QBCS0 and QBCS1. This mode is the QuadCS disabled mode. Alternatively, when the QCSEN input pin is pulled low, the component has four chip select inputs DCS[3:0], and four chip select outputs, QCS[3:0]. This mode is the QuadCS enabled mode.

When  $\overline{\text{QCSEN}}$  is high or floating, the device also supports an operating mode that allows a single device to be mounted on the back side of a DIMM array. This device can then be configured to keep the input bus termination (IBT) feature enabled for all input signals independent of MIRROR. The SN74SSQE32882. operates from a differential clock (CK and  $\overline{\text{CK}}$ ). Data are registered at the crossing of CK going high and  $\overline{\text{CK}}$  going low. This data can either be re-driven to the outputs or used to access internal control registers. Details are covered in the Function Tables (each flip-flop) with  $\overline{\text{QCSEN}} = \text{low}$ .

Input bus data integrity is protected by a parity function. All address and command input signals are summed; the last bit of the sum is then compared to the parity signal delivered by the system at the PAR\_IN input one clock cycle later. If these two values do not match, the device pulls the open drain output ERROUT low. The control signals (DCKE0, DCKE1, DODT0, DODT1, and DCS[n:0]) are not part of this computation.

The SN74SSQE32882 implements different power-saving mechanisms to reduce thermal power dissipation and to support system power-down states. Power consumption is further reduced by disabling unused outputs.

The package design is optimal for high-density DIMMs. By aligning input and output positions towards DIMM finger-signal ordering and SDRAM ballout, the device de-scrambles the DIMM traces and allows low crosstalk designs with low interconnect latency. Edge-controlled outputs reduce ringing and improve signal eye opening at the SDRAM inputs.

Instruments

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

All trademarks are the property of their respective owners.





These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

#### ORDERING INFORMATION(1)

T <sub>CASE</sub>	PAG	CKAGE <sup>(2)</sup>	ORDERABLE PART NUMBER	TOP-SIDE MARKING
0°C - T <sub>case</sub>	176ZAL	Tape and Reel	SN74SSQE32882ZALR	TE32882E
(see Table 1)	176ZCJ	Tape and Reel	SN74SSQE32882ZCJR	TE32882E

- (1) For the most current package and ordering information see the Package Option Addendum at the end of this document, or see the TI web site at www.ti.com.
- (2) Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.

#### **ELECTRICAL CHARACTERISTICS**

#### **ABSOLUTE MAXIMUM RATINGS**

Over operating free-air temperature range (unless otherwise noted). (1)

	PARAMETER		VALUE	UNIT	
$V_{DD}$	Supply voltage		-0.4 to +1.975	V	
VI	Receiver input voltage	See (2) and (3)	-0.4 to V <sub>DD</sub> + 0.5	V	
$V_{REF}$	Reference voltage		-0.4 to V <sub>DD</sub> + 0.5	V	
Vo	Driver output voltage	See (2) and (3)	-0.4 to V <sub>DD</sub> + 0.5	V	
I <sub>IK</sub>	Input clamp current	$V_I < 0 \text{ or } V_I > V_{DD}$	-50	mA	
lok	Output clamp current	$V_O < 0$ or $V_O > V_{DD}$	±50	mA	
Io	Continuous output current	0 < V <sub>O</sub> < V <sub>DD</sub>	±50	mA	
I <sub>CCC</sub>	Continuous current through each V <sub>DD</sub> or GND pin		±100	mA	
T <sub>stg</sub>	Storage temperature		-65 to +150	°C	

- (1) Stresses beyond those listed under *absolute maximum ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *operating conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) The input and output negative-voltage ratings may be exceeded if the input and output clamp-current ratings are observed.
- (3) This value is limited to 2.2 V maximum.

#### Table 1. Case Temperature vs Speed Node

	PARAMETER		DDR3-1066	DDR3-1333	DDR3-1600	UNIT
T <sub>case</sub>	Maximum case temperature (1)	+109	+108	+106	+103	°C

(1) The temperature values fit to JEDEC RAW cards A, B, and C. The user must keep T<sub>case</sub> below the specified values in order to keep the junction temperature below +125°C. Other combinations of features and termination resistors can require lower case temperature and extra cooling. These combinations depend on the specific application.



#### PACKAGE INFORMATION

# **ZAL Package**


The package is an 8-mm  $\times$  13.5-mm, 176-pin ball grid array (BGA) with 0.65-mm ball pitch in an 11  $\times$  20 grid. The device pinout supports outputs on the outer two left and right columns to support easy DIMM signal routing. Corresponding inputs are placed in such a way that two devices can be placed back-to-back for four rank modules while the data inputs share the same vias. Each input and output is located close to an associated no-ball position or on the outer two rows to allow for low-cost via technology combined with the small, 0.65-mm ball pitch.

	1	2	3	4	5	6	7	8	9	10	11
Α											
В											
С							::			::-	
D							: :			::	
Ε							: :				
F											
G							: :			::	
Н							::			::	
J		:					: :				
K		:					: :				
L							: :				
М											
N							: :				
Р		::					: :				
R		: :					: :		: :		
Т		: :									
U				: :			: :				
٧											
W				::							
Υ											



# **ZCJ Package**

The package is an 6-mm  $\times$  15-mm, 176-pin ball grid array (BGA) with 0.65-mm ball pitch in an 8  $\times$  22 grid. The device pinout supports outputs on the outer two left and right columns to support easy DIMM signal routing. Corresponding inputs are placed in such a way that two devices can be placed back-to-back for four rank modules while the data inputs share the same vias.

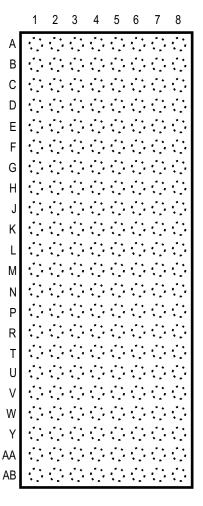

#### NOTE:

To request more information on SN74SSQE32882 DDR3 Register/PLL please contact support@ti.com.

www.ti.com 11-Nov-2025

#### PACKAGING INFORMATION

Orderable part number	Status	Material type	Package   Pins	Package qty   Carrier	RoHS	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
						(4)	(5)		
SN74SSQE32882ZALR	NRND	Production	NFBGA (ZAL)   176	2000   LARGE T&R	Yes	SNAGCU	Level-3-260C-168 HR	0 to 85	TE32882E

<sup>(1)</sup> Status: For more details on status, see our product life cycle.

- (3) RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.
- (4) Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.
- (5) MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.
- (6) Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

<sup>(2)</sup> Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

# PACKAGE MATERIALS INFORMATION

www.ti.com 29-Sep-2019

# TAPE AND REEL INFORMATION





	Dimension designed to accommodate the component width
	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers


# QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74SSQE32882ZALR	NFBGA	ZAL	176	2000	330.0	24.4	8.3	13.8	1.8	12.0	24.0	Q1

www.ti.com 29-Sep-2019

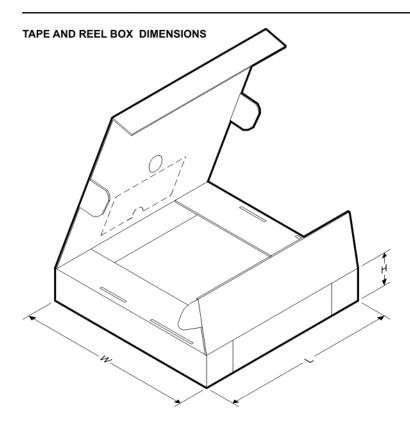


#### \*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74SSQE32882ZALR	NFBGA	ZAL	176	2000	336.6	336.6	31.8

# ZAL (R-PBGA-N176)

# PLASTIC BALL GRID ARRAY

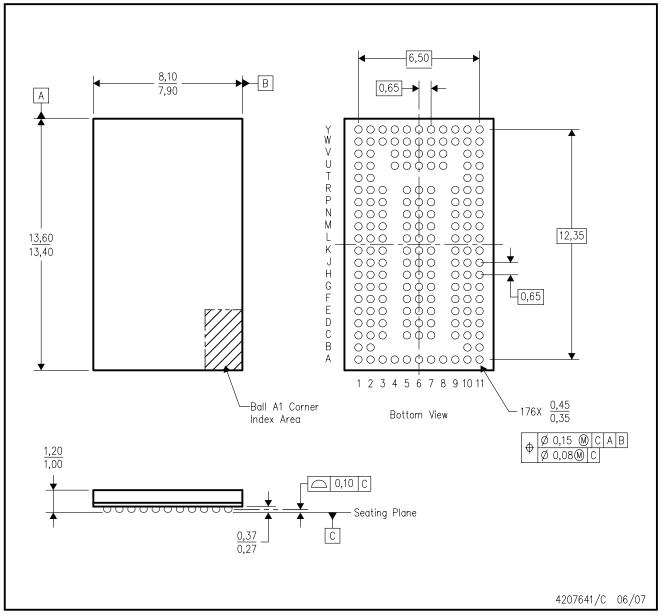

NOTES: A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.

- B. This drawing is subject to change without notice.
- C. This package is lead-free.



## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025